

2 SPEED ELECTRICAL LAYOUT FOR PD DRIVES USED ON SKID STEER LOADERS NOT FITTED WITH SERVICE PLUG



ALL PURCHASED 2-SPEED DRIVES INCLUDE



- 3m (10ft) harness from drive unit with 2 pin Deutsch plug
- *Optional in cab controller with cigarette lighter, power supply and 6m (20ft) extension harness sold separately (1)*
- *Optional Joystick controls and foot controls sold separately (2)*

ALL 2-SPEED DRIVES

- 3m (10ft) harness with 2 pin male Deutsch plug factory installed in drive unit at time of order
- Re-order Part Number (DM-000021)

HYDRAULIC LINES FOR 2 SPEED DRIVES.

- -Hydraulic Supply
- -Return
- -Electrical Harness
- -Case Drain*
(Back to Hydraulic Reservoir)

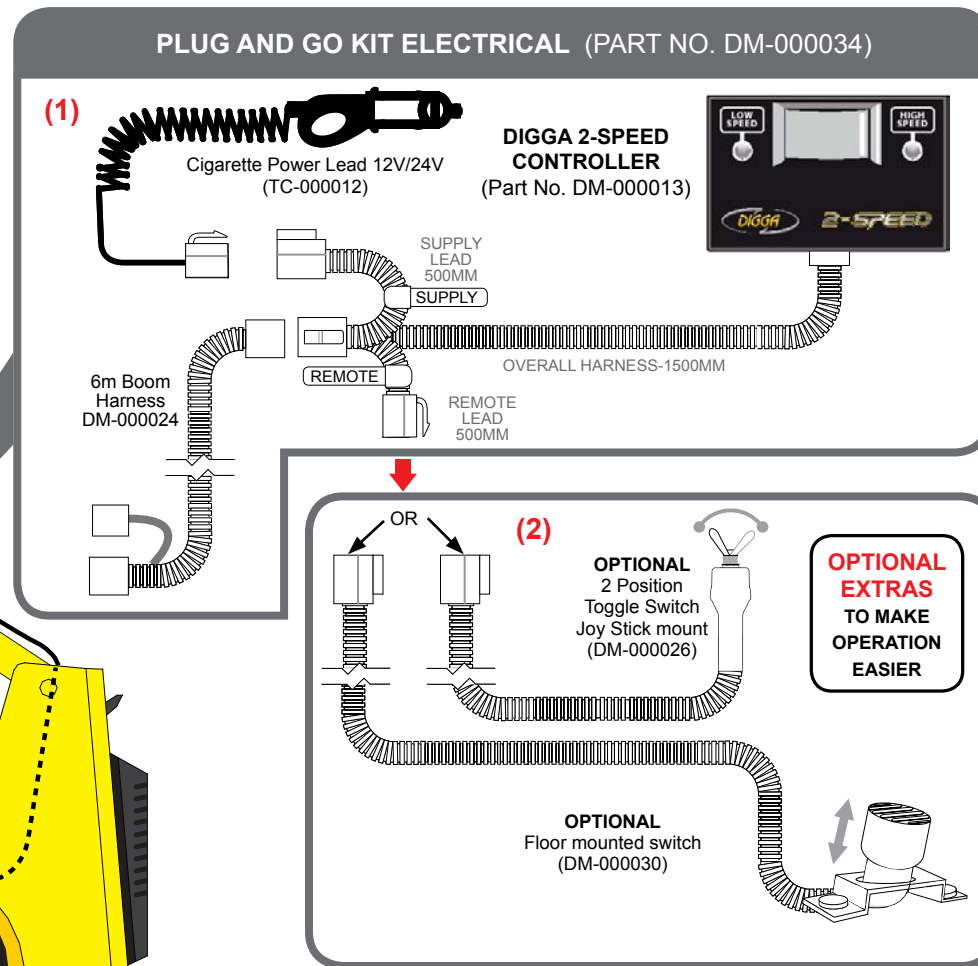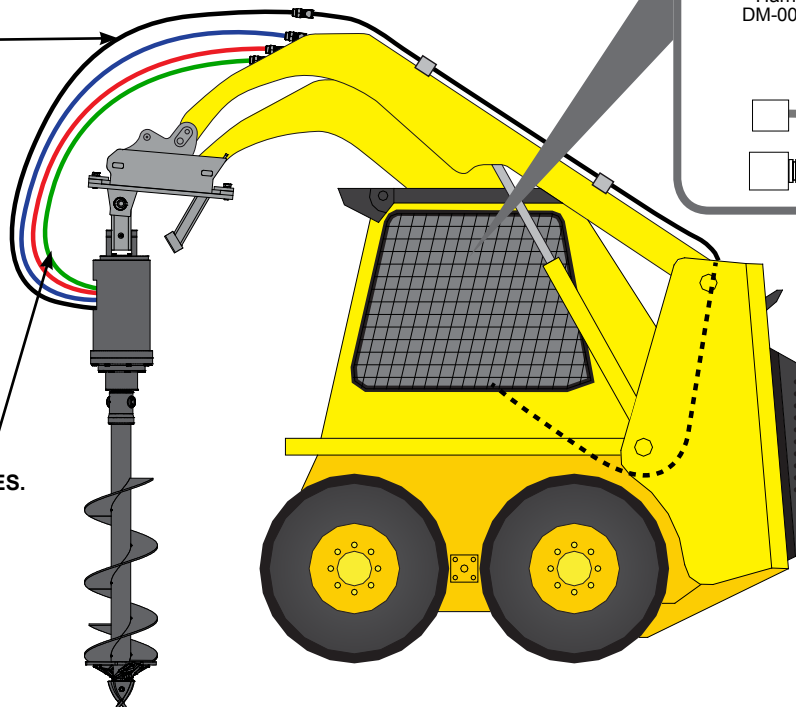

* NOTE: Case drain not required on STD flow 2 speed drives (2k motor series)

High flow 2 speed drives (VIS motor series) require a case drain to be connected

NOTE

WHEN USING A 2 SPEED DRIVE WHICH IS POWERED BY AN EATON VIS HYDRAULIC MOTOR, THE CASE DRAIN HOSE MUST BE CONNECTED.

2 SPEED ELECTRICAL LAYOUT FOR PD DRIVE UNITS

